


Technical Data Sheet

RENOLIT QUELLMAX Plus

Bentonite waterstop joint preventing water from penetrating around singular points.

DESCRIPTION

RENOLIT QUELLMAX Plus is a water-swelling bentonite waterstop joint coated with patented protective layer. The product consists of sodium-based bentonite (natural clay) embedded in a polyisobutylene rubber matrix as well as special fillers and crystalline additives. Bentonite has the property of rapidly expanding its volume by swelling, when it comes into contact with water. It exhibits strong, fast and reliable swelling performance. The **RENOLIT QUELLMAX Plus** has the advantage of not reacting to contact with rainwater or moisture during installation, thanks to its protective coating. To be activated, the **RENOLIT QUELLMAX Plus** must be covered with fresh concrete, the pH of the fresh concrete to dissolve the protective coating. **RENOLIT QUELLMAX** is tested and approved up to a water pressure of 3 bar.

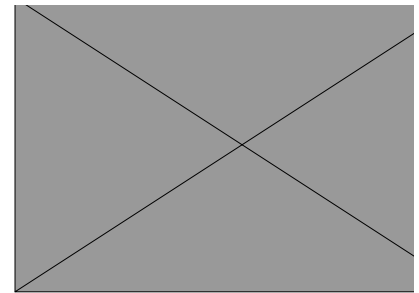

APPLICATIONS

RENOLIT QUELLMAX Plus is designed to prevent water ingress through construction joints and around the penetrations in watertight concrete structures equipped with **RENOLIT ALKORPLAN Pro** fully-bonded system. The area of applications includes below ground concrete structures, water reservoirs, rainwater retention basins, waste water treatment plants and concrete structures.


REGULATIONS & STANDARDS

- ETA QUELLMAX 20/0262
- HYG Drinking Water Approval

STORAGE & HANDLING

The **RENOLIT QUELLMAX** waterstop is packed in cardboard box and should be stored off the ground, in dry conditions which are free from frost.

Code	Description	Packaging
7500027	RENOLIT QUELLMAX Plus Bentonite joint to install in construction joint, around the pipe penetrations and pile caps in concrete structure. Dimension: 18 mm x 24 mm	30 m per box 900 m per pallet
7500028	Fitting rail for RENOLIT QUELLMAX Plus Steel rail used to fasten the RENOLIT QUELLMAX Plus on the support. Dimension: 20 mm x 1 m	30 m per box

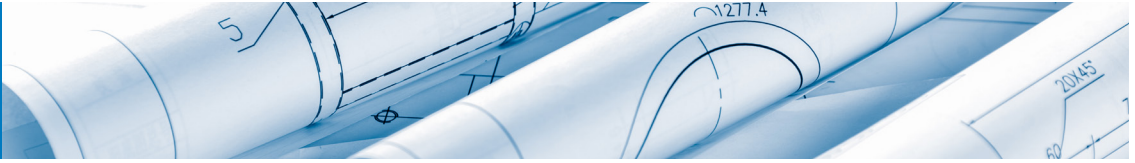


ESSENTIAL FEATURES

Properties	Test standard	Units	Performance
Specific weight	ETA-20/0262	g/m	760
Colour	ETA-20/0262	-	Black/Dark grey
Swelling behavior in deionized water	ETA-20/0262 13 days - 23°C	%	420
Swelling behavior in alkaline solution	ETA-20/0262 13 days - 23°C	%	425
Swelling behavior in acid solution	ETA-20/0262 13 days - 23°C	%	177
Swelling pressure	ETA-20/0262	N/mm ²	0.5
Watertightness in construction joint condition	ETA-20/0262	Bar	3
Toxicity	ETA-20/0262	-	Non-hazardous category material

INSTALLATION

As a general rule, the surface onto which **RENOLIT QUELLMAX Plus** is to be placed should be dry, clean and flat. The swellable **RENOLIT QUELLMAX Plus** must have perfect and continuous contact to the support (no void is permitted). To fasten the **RENOLIT QUELLMAX Plus** you can either use **RENOLIT QUELLMAX** fitting rails and steel nails or **RENOLIT CEM 805** Mastic glue. The **RENOLIT QUELLMAX Plus** tape need to be laid in the middle of the wall. There should be a minimum of 80 mm of concrete covering all sides of the **RENOLIT QUELLMAX Waterstop**.

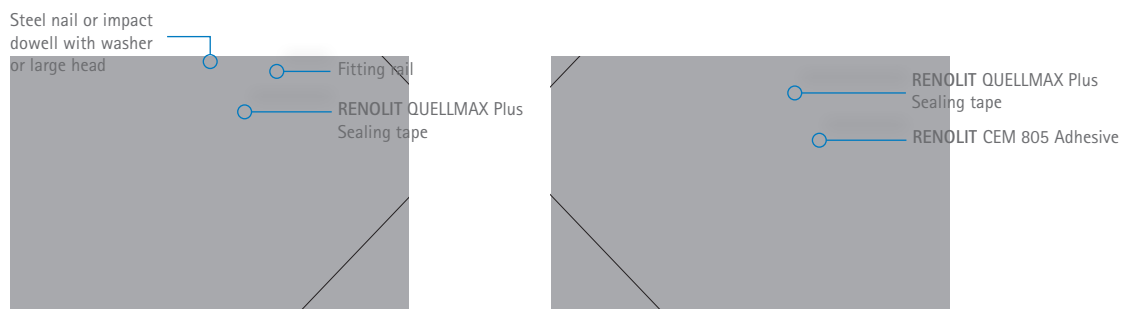

These data are statistic figures according to Harmonized European Standards. This document cancels and replaces any other document previously published. In order to improve his products, the manufacturer reserves the right to change them without prior notice.