

RENOLIT ALKORPLAN^{81060 / 81061}

Internal & external corners



PRODUCT DESCRIPTION

The RENOLIT ALKORPLAN corners are made of 1.5 mm thick unreinforced PVC and are compatible with the RENOLIT ALKORPLAN roofing membranes.

CHARACTERISTICS

- Simple and quick finishing of roof corners.
- Excellent weldability
- Recyclable

PRODUCT DATA

	White 90300	Light grey 71004	Charcoal 79851	Lead grey 73321	Copper green 60884	Terracotta 82119	Cool grey 77040	Cool ivory 11014
Internal corners	81060-001	81060-003	81060-010	81060-014	81060-015	81060-016	81060-017	81060-018
External corners	81061-001	81061-003	81061-010	81061-014	81061-015	81061-016	81061-017	81061-018

FIELD OF APPLICATION


- The RENOLIT ALKORPLAN corners are used as prefabricated corners on RENOLIT ALKORPLAN roofing membranes.

INSTALLATION

- The corner pieces are welded onto the roof area by means of hot air welding.
- Hand weld using the 20 mm nozzle.
- Apply seam sealer RENOLIT ALKORPLAN 81038 along the edges.
- Install according to the RENOLIT ALKORPLAN installation instructions

PACKAGING

- The RENOLIT ALKORPLAN corners are packed in boxes of 20 pieces.

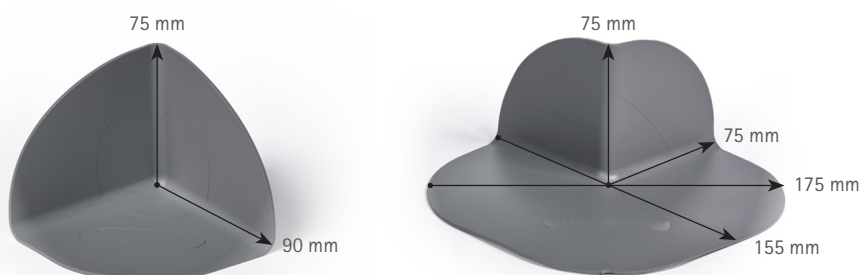

WWW.RENOLIT.ALKORPLAN.COM



RENOLIT Belgium N.V - Export Dpt. - Industriepark De Bruwaan 43 - 9700 OUDENAARDE - Belgium
 T +32 (0)55 33 98 51 - F +32 (0)55 31 86 58 - renolit.belgium@renolit.com

Rely on it.