



*Rely on it.*

# RENOLIT ALKORPLAN


Metal sheet



EXCELLENCE  
IN ROOFING

# RENOLIT ALKORPLAN<sub>81170/81179</sub>

## Metal sheet

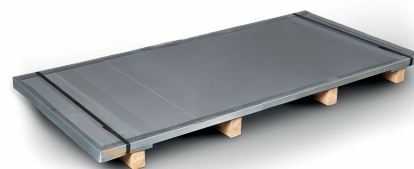

Galvanised metal sheet 0.6 mm thick with a 0.80 mm unreinforced RENOLIT ALKORPLAN membrane laminated to the surface. The metal face is treated with an anti-corrosion coating.

### Application

Specifically designed as an accessory for RENOLIT ALKORPLAN roofing systems to provide high quality upstands and parapets: intermediate support on unbonded upstands over 500mm high, linear edge restraint, metal profiles to cover parapets or to connect roof lights.

### Delivery

Type	Colour	Dimensions	Weight	Pieces/Pallet
81170-003	Light grey- 71004	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10/ 30
81170-009	Charcoal - 79851	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10/ 30
81170-011	Grey - 73321	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10 /30
81170-010	Terracotta - 82119	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10
81170-012	Copper green - 60884	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10
81179-704	White - 90300 *	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10
81179-705	Cool grey - 77040 *	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10
81179-706	Cool Ivory - 11014 *	1 m x 2 m	5,8 Kg/m <sup>2</sup>	10
Profiles				
81170-004	Light grey - 71004	(10 x 40 x 10 mm) x 2 m		20
81170-005	Light grey - 71004	(10 x 10 x 40 x 10 mm) x 2 m		20
81170-006	Light grey - 71004	(10 x 70 x 50 x 10 mm) x 2 m		20

\* Membrane thickness: 0.85 mm



81170-004  
Linear fixation profile



81170-005  
Vertical connection profile



81170-006  
L-shaped connection profile

### Storage

Store dry and in the original packing

[WWW.RENOLIT.COM/ROOFING](http://WWW.RENOLIT.COM/ROOFING)

RENOLIT Belgium - Export department - Industriepark De Bruwaan 43 - 9700 Oudenaarde  
T +32 55 33 98 51 - F +32 55 31 86 58 - [renolit.belgium@renolit.com](mailto:renolit.belgium@renolit.com)



Rely on it.